




MacroView

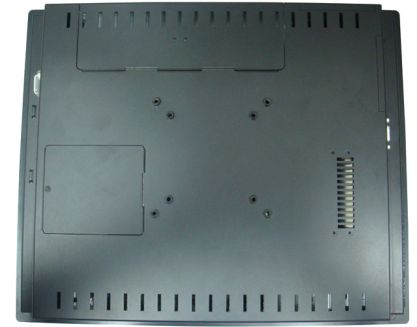

	PPC-089T	PPC-101T	PPC-116T	PPC-133T	APC-156PC
Processor	Intel Dimondville 1.6GHz Processor (Atom N270)				
BIOS	1024K BB Flash ROM				
Chipset	Mobile Intel Express 945GSE + ICH7M				
Main Memory (option)	DDRII SO-DIMM 512Mb, up to 2GB Easy Upgrade				
LCD Display	LED backlight, A grade LCD Panel, Criteria 3.3.5 Options				
	8.9" 1024x600 Contrast 400:1 ,Brightness 200 cd/m2	10.1" 1024x576 Contrast 500:1 ,Brightness 200 cd/m2	11.6" 1366x768 Contrast 600:1 ,Brightness 220 cd/m2	13.3" 1366x768 Contrast 500:1 ,Brightness 220 cd/m2	15.6" 1366x768 Contrast 600:1 ,Brightness 220 cd/m2
Touch Screen (option)	With 4 wire Resistive Touch Panel supported			With 5 wire Resistive Touch Panel supported	
Graphics	Integrated in Intel 945GSE + ICH7M graphics controller				
Hard Disk Drive (option)	2.5" 160GB SATA HDD/Express card SSD/SATA SSD Easy Upgrade				
Bluetooth (option)	Bluetooth V2.1+EDR by USB 2.0 dongle				
LAN & WLAN	Ethernet 10/100 Base T IEEE 802.11b+g+n WLAN by mini card				
Web Cam (option)	Web Cam 1.3M Pixel				
HSDPA (option)	Embedded 3.5G HSDPA on board support.				
Mic (option)	Internal Mic				
Speakers	2 x 2.0Watt 8 Ohm Speakers				
Interface I/O Port	Media Card Slot (SD/MMC) * 1 Express Card (Mini PCIe) * 1 USB * 3 Audio Jack * 2 (Mic-in and Headphone out) VGA D-Sub * 1 DC-in *1				
System Status LED	Power on/Suspend, Battery Charging, HDD Access, RF, Caps Lock, Number Lock				
Buttons & Switch	Power on/off switch				
Card Reader	Support Media card slot (SD/MMC) * 1, 4 in 1				
Power Management	Full feature ACPI power management, Stand-by, Suspend to Disk, Suspend to RAM, ACPI 1.0b supported.				
Battery Pack (options)	Li-Ion 4 cells, 7.4V 5200mAh Battery life up to 4.5hrs (estimate)	Li-Ion 4 cells, 7.4V 5200mAh Battery life up to 4hrs (estimate)	Li-Ion 4 cells, 7.4V 5200mAh Battery life up to 3.5hrs (estimate) Li-Ion 6 cells, 7.4V 7800mAh Battery life up to 4.5hrs(estimate)	Li-Ion 4 cells, 7.4V 5200mAh Battery life up to 3.5hrs (estimate) Li-Ion 6 cells, 7.4V 7800mAh Battery life up to 4.5hrs(estimate)	Li-Ion 12 cells, 7.4V 15600mAh Battery life up to 8hrs (estimate) Li-Ion 6 cells, 7.4V 7800mAh Battery life up to 4.5hrs(estimate)
AC adapter	Output: 12V DC, 3A, 36W with Power Cord. Input: 100-240V AC, 50/60Hz Universal				
Housing	Customize metal housing and Aluminum Front Bezel				
Support OS	Windows XP / Window XP embedded /Linux Not include				
Frame Dimension (H x W x D)	311 x 220 x 42	311 x 220 x 42	311 x 220 x 42	345 x 260 x 42	389 x 289 x 42
Weight	N.W / 2.3 (kgs) G.W / 2.8 (kgs)	N.W / 2.2 (kgs) G.W / 3.0 (kgs)	N.W / 2.4 (kgs) G.W / 3.2 (kgs)	N.W / 3.0 (kgs) G.W / 3.7 (kgs)	N.W / 3.6(kgs) G.W / 4.4 (kgs)
Battery Weight	235 (g) (4 Cells)		235 & 350 (g) (4 Cells & 6 Cells)	235 & 350 (g) (4 Cells & 6 Cells)	350 & 700 (g) (6 Cells & 12 Cells)
Country Original	Made In Taiwan				