



15" Open frame Touch Monitor (Model: OPT150)

LCD Technology	<ul style="list-style-type: none"> • Active matrix TFT color LCD • 15" diagonal screen size • 1024 x 768 addressable pixels • 0.297 mm x 0.297 mm Pixel Pitch • 350 cd/m² 550 cd/m²(typ.) Brightness • 500:1 (typ.) Contrast Ratio • Tr+Tf: 12ms (typ.) • H/V:130° / 120° H/V:140/120 Viewing Angle
Display Resolution	1024 pixels (H) x 768 lines (V)
Touch Panel	5W Resistive /CAP /SAW Type with RS232 or USB interface connector
Active Display Area	304.128 (H) x 228.096 (V) mm
Displayable Color	16.2millions colors
Horizontal Scan	31.5 kHz to 60kHz
Vertical Refresh	56 Hz to 75Hz
Pixel Frequency	110MHz
Compatibility	<ul style="list-style-type: none"> • IBM & VESA VGA 640 x 350, 70 Hz 640 x 400, 70 Hz 720 x 400, 70 Hz 640 x 480, 60 Hz • VESA VGA 640 x 480, 72/75 Hz • VESA SVGA 800 x 600, 56/60/72/75 Hz • VESA XGA 1024 x 768, 60/70/75 Hz
Input Signal	Analog RGB 0.7 Vp-p
Auto-adjustment	Yes
I/O Connectors	<ul style="list-style-type: none"> • DC power in • VGA in D-sub 15 pin DVI (Option) • RS232 or USB
User Controls	<ul style="list-style-type: none"> • Power On/Off Button • External Auto-Adjustment • OSD Control items: Auto Tune, Auto Contrast, Brightness, Contrast, H Position, V Position, Detail Adjust, Color Temperate, OSD Setup, Image Setting, Recall
Power Saving	VESA DPMS standard (4 mode)
Power Consumption	18 watt (max.), < 3 watt (stand by mode)
Agency approval	FCC, UL, CE
Environmental operating temperature	5 °~35°C
Humidity	80% maximum

Storage	<ul style="list-style-type: none"> • Temperature: -20°~60°C / -4°~140°F • Humidity: 95% maximum
Dimension (W*H*D)	357mm *284 mm * 41.5mm
Weight	N.W. 3 Kg G.W. 4.2Kg

The specification of the product is for reference only. It might be changed without any notice.

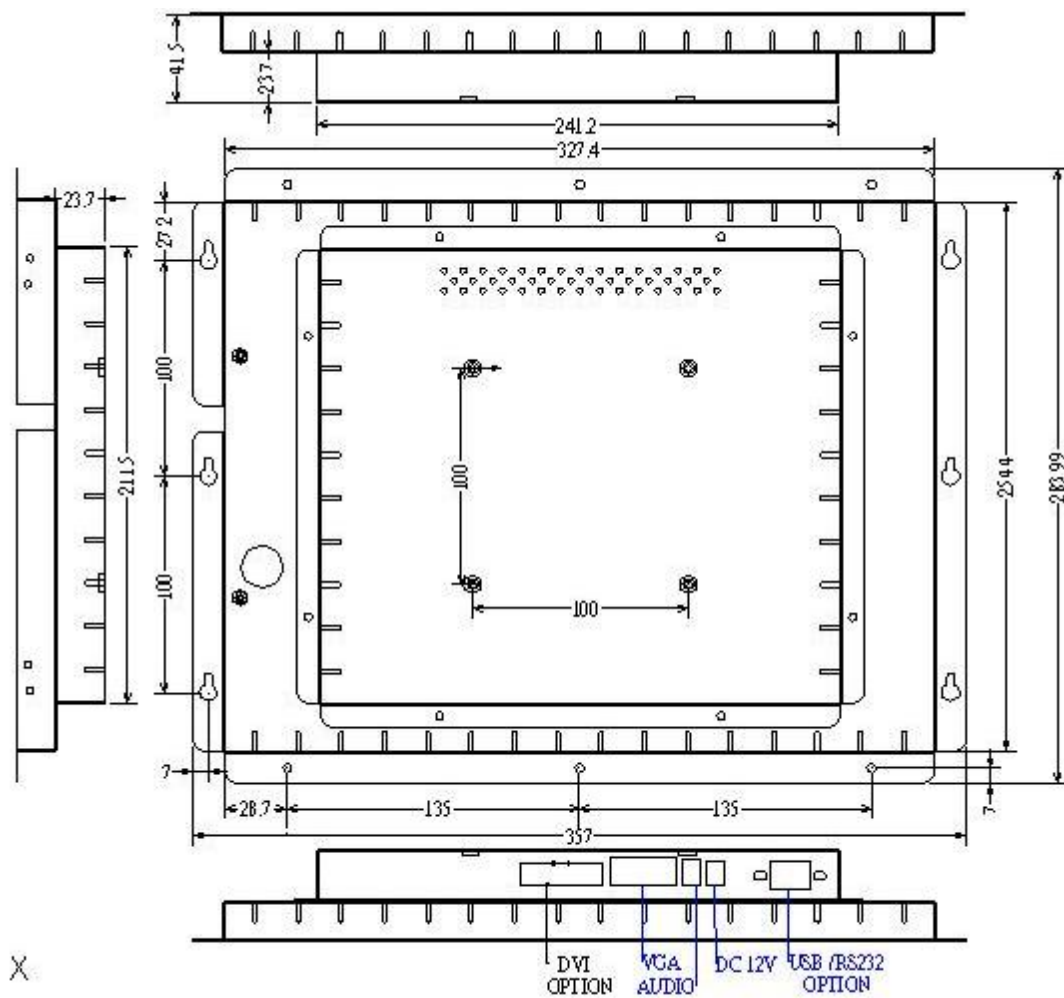

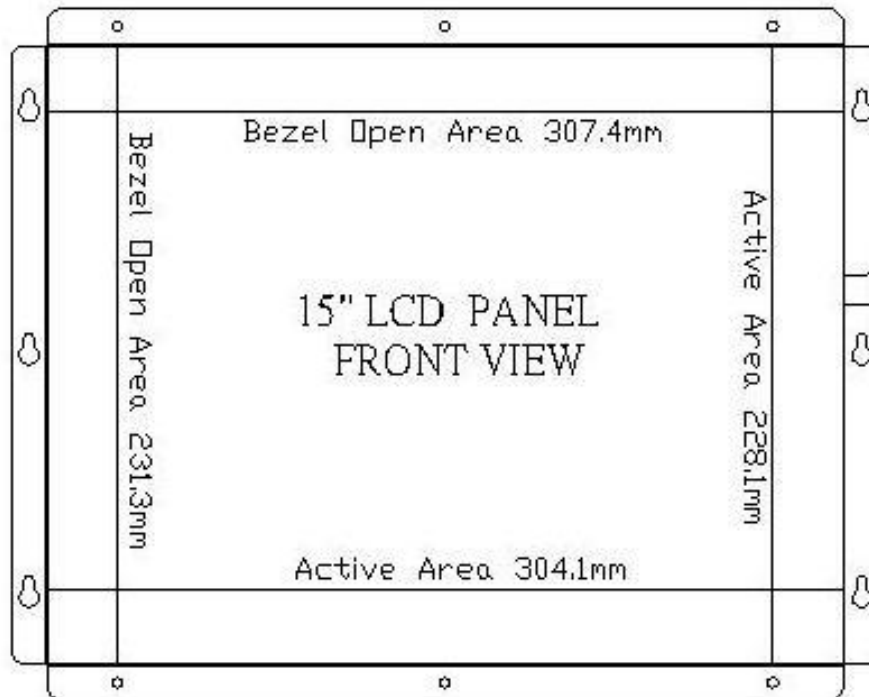

OP / OPT150