



PM-220

Metal Monitor Touch Screen Display
Panel Mount / Vesa Mount Monitor
Aluminum Frame with Metal Enclosure

❖ Specification

LCD Type	22" Active Matrix , TFT
Aspect Ratio	16:10 Format
Resolution	WSXGA+ (1680X1050)
Pixel Pitch	0.282mm x 0.282mm
Active Area	473.8 x296.1
Contrast Ratio	2000:1 (typ.)
Brightness	300 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	8ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V / 24 V (option) in
Power Consumption	48 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 6.3kgs / G.W 7.2kgs
Dimension	mm

❖ Ordering Information


PM-220	22" Monitor Only
PMT-220R	22" Monitor + 5-W Resistive Touchscreen
PMT-220C	22" Monitor + Capacitive Touchscreen

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver



❖ Dimension

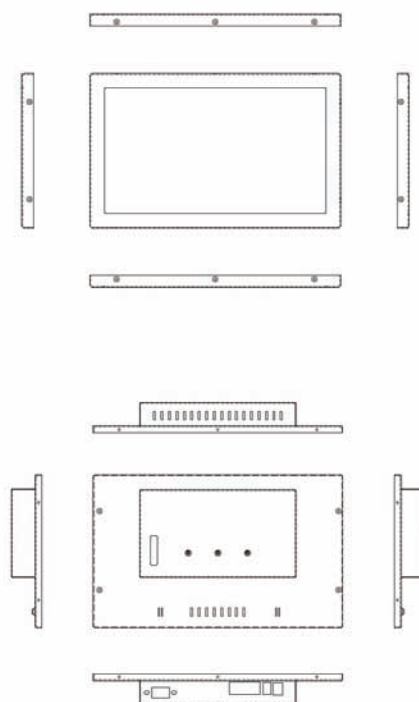

Contact Us

Macro Power
Macro Power Technology Co., Ltd
(T) +886-3-327-1733 (F) +886-3-327-1723
sales@macropower.com.tw