



PM-550

Metal Frame 55" Panel / Chassis Mount LCD Display
AR/AG Coating Front Glass / IR Touch Screen (Options)
450 cd/m² High Brightness



❖ Specification

LCD Type	55" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1920X1080 (FHD)
Pixel Pitch	0.63 mm x 0.21 mm
Active Area	1209.6 x 680.4
Contrast Ratio	4000:1 (typ.)
Brightness	450 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	8 ms (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA (standard) / DVI-D / HDMI (options)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240V
Power Consumption	285 watt (Max)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	400 x 300 (option)
Weight	N.W 20.5 kgs / G.W 24 kgs
Dimension	1290 x 749 x 98



❖ Ordering Information

PM-550	55" Display Only
PMT-550I	55" Display + 55" IR Touch Screen
PMG-550	55" Display+ Front Protect Glass
	Anti Vandal / AR / AG Surface Coating for options

❖ Accessories

(Standard) VGA Cable , AC Power Cord
 (Option) DVI Cable , HDMI Cable , Touch Driver , USB Cable ,

❖ Dimension

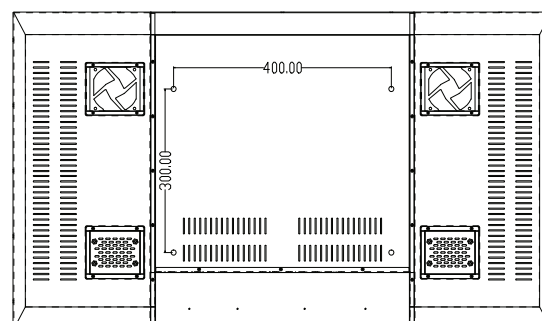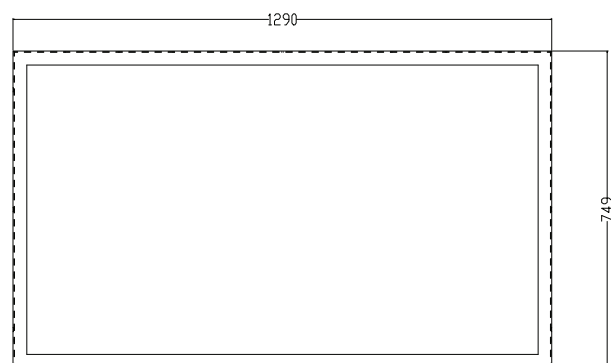

Contact Us

Macro Power
 Macro Power Technology Co., Ltd
 (T) +886-3-327-1733 (F) +886-3-327-1723
 sales@macropower.com.tw