

OP-150

Metal Openframe Touch Screen Display

Low Consumption Power

Contrast Increase

❖ Specification

LCD Type	15" Active Matrix , TFT
Aspect Ratio	4:3 Format
Resolution	1024X768(XGA)
Pixel Pitch	0.297mm x 0.297mm
Active Area	304.1 x 228.1
Contrast Ratio	700:1 (typ.)
Brightness	350 (cd/m ²)
View Angle (H/V)	160 / 140
Response Time	8ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	15 watt (Max) < 1 watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 3.2kgs / G.W 4.2kgs
Dimension	360.6 x 298.6 x 48.3

❖ Ordering Information

OP-150	15" Openframe Only
OPT-150R	15" Openframe + 5-W Resistive Touchscreen
OPT-150C	15" Openframe + Capacitive Touchscreen


❖ Accessories

12V DC Adapter , Power Cord ,DVI Cable , VGA Cable ,

USB Cable , Touch Driver



❖ Dimension

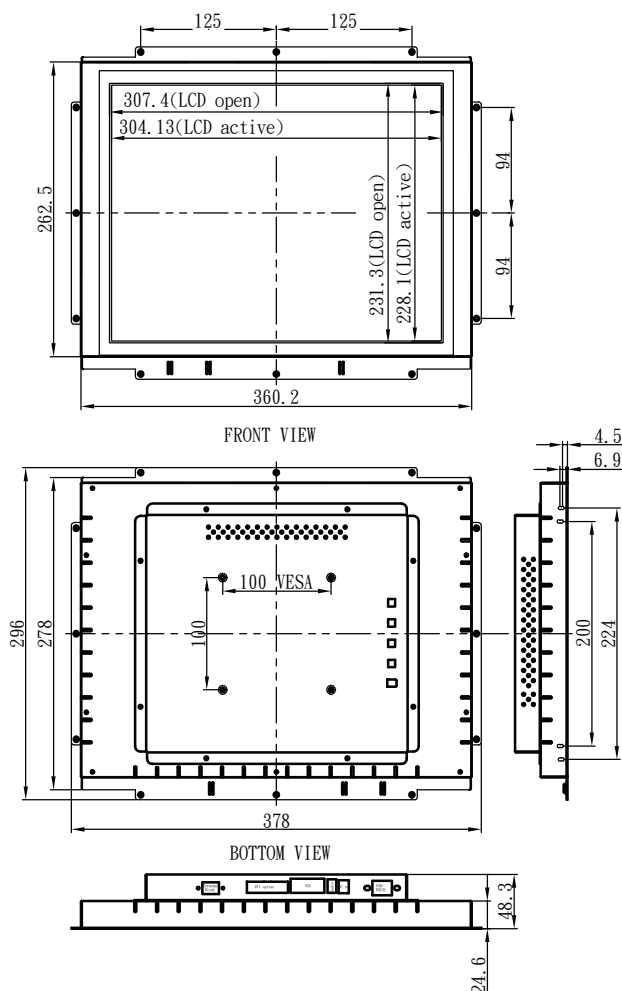

Contact Us



Macro Power

Macro Power Technology Co., Ltd

(T) +886-3-327-1733 (F) +886-3-327-1723

sales@macropower.com.tw