

OP-170

Metal Openframe Touch Screen Display
Low Consumption Power
Contrast Increase

❖ Specification

LCD Type	17" Active Matrix , TFT
Aspect Ratio	4:3 Format
Resolution	1280X1024 (SXGA)
Pixel Pitch	0.264mm x 0.264mm
Active Area	337.9 x 270.3
Contrast Ratio	1000:1 (typ.)
Brightness	380 (cd/m ²)
View Angle (H/V)	170 / 160
Response Time	5ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	32 watt (Max) < 1 watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 4.1kgs / G.W 5.8kgs
Dimension	415 x 335 x 51.2

❖ Ordering Information


OP-170	17" Openframe Only
OPT-170R	17" Openframe + 5-W Resistive Touchscreen
OPT-170C	17" Openframe + Capacitive Touchscreen

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable
, Touch Driver



❖ Dimension

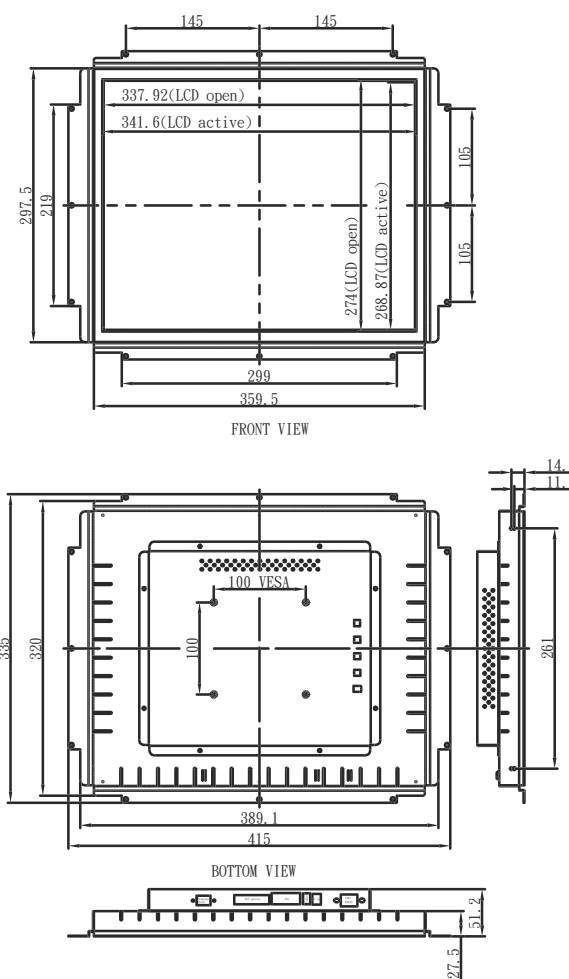

Contact Us

Macro Power
 Macro Power Technology Co., Ltd
 (T) +886-3-327-1733 (F) +886-3-327-1723
 sales@macropower.com.tw