

PM-220SB



Metal Openframe Touch Screen Display
Low Consumption Power
Super High Brightness 1000~1200 nits


❖ Specification

LCD Type	22" Active Matrix , TFT
Aspect Ratio	16:10 Format
Resolution	1680X1050 (WSXGA)
Pixel Pitch	0.282mm. x 0.282mm
Active Area	473.8 x296.1
Contrast Ratio	2000:1 (typ.)
Brightness	1000 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	8ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	YES
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V / 24V Adapter
Power Consumption	65 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W kgs / G.W kgs
Dimension	mm

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver

❖ Dimension

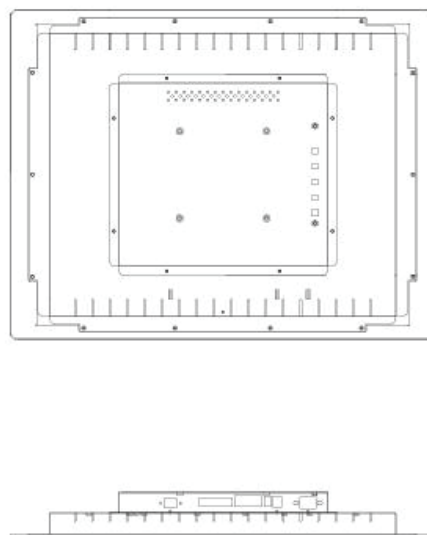

❖ Ordering Information

PM-220SB	22" Monitor Only
PMT-220SBR	22" Monitor + 5-W Resistive Touchscreen
PMT-220SBC	22" Monitor + Capacitive Touchscreen